

Miniature gauge for applications where space constraints are a concern
 Suitable for air, water, oil, gas or other media not corrosive to Copper alloy


SPECIFICATIONS

Dial	1" (25.4 mm)
Case	Nickel plated hex case, dry non-fillable
Wetted Parts	Copper alloy
Ranges	0/160 - 0/6000
Bezel	Fixed
Lens	Plastic
Pointer	Yellow
Connection	Center back mount 1/8" NPT
Scale	Standard: single scale psi
Accuracy	5% of span, ASME B40.1 Grade D
Ambient Temp	Dry = -50° F to 160° F

Design meets or exceeds ASME B40.100 pressure gauge standard.



5

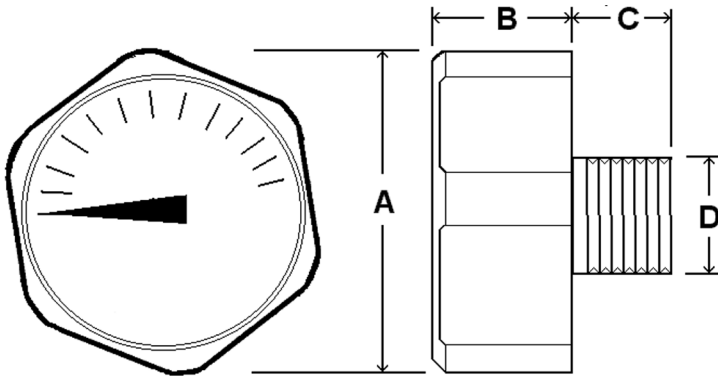

Dial	Unit	A	B	C	D
1"	In.	1.00"	0.40"	0.35"	1/8"
	mm	25	10	9	NPT

STANDARD DIAL CONFIGURATIONS FOR HEX GAUGE SERIES

Part Number	Dial Range	Figure Intervals	Graduation Intervals
HEX-108RF	0/160 psi	40 psi	10 psi
HEX-108RH	0/300 psi	100 psi	20 psi
HEX-108RJ	0/500 psi	100 psi	20 psi
HEX-108RL	0/750 psi	200 psi	50 psi
HEX-108RM	0/1000 psi	200 psi	40 psi
HEX-108RN	0/1200 psi	400 psi	80 psi
HEX108RQ	0/4000 psi	1000 psi	200 psi
HEX-108RR	0/5000 psi	1000 psi	200 psi
HEX-108RS	0/6000 psi	2000 psi	333 psi

AVAILABLE OPTIONS*

- Custom Dial
- Special Connection Size
- Other Ranges
- White Dial Custom Only, Non-Stock Option

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
1"	0.35 lbs (0.16 kg)	upon request