



40MM POSITIONER GAUGE


Bourdon tube gauge for applications requiring installation of multiple units
Suitable for applications where space constraints are a concern

SPECIFICATIONS

Dial	40 mm
Case	Stainless steel, dry yet fillable
Wetted Parts	316 Stainless steel
Ranges	0/30, 0/60, 0/100, 0/160 psi
Lens	Plastic
Pointer	Black aluminum
Connection	Center back mount 1/8" NPT
Scale	Standard: psi/BAR (x 100 = kPa)
Accuracy	3-2-3% of span, ASME B40.1 Grade B
Ambient Temp	Dry = -30° F to 180° F Glycerine Filled = 30° F to 160° F



Design meets or exceeds ASME B40.100 pressure gauge standard.

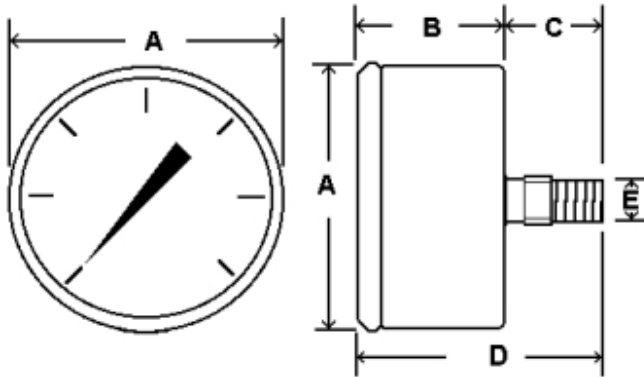

Dial	Unit	A	B	C	D	E
40 mm	In.	1.61"	1.02"	0.84"	1.76"	1/8"
	mm	41	26	21	45	NPT

AVAILABLE OPTIONS*

- Custom Dial
- Special Connection Size
- Special Accuracy
- Other Ranges
- Copper alloy Internals

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
40 mm	0.20 lbs (0.08 kg)	50

40MM PART NUMBERS

Part Number	Dial Range	Figure Intervals	Graduation Intervals
40MM-SS-C	0/30 psi	5 psi	0.5 psi
40MM-SS-D	0/60 psi	10 psi	1 psi
40MM-SS-E	0/100 psi	20 psi	2 psi
40MM-SS-F	0/160 psi	20 psi	2 psi