

# 502D-UNO SERIES




“Use No Oil” gauge designed for use on compressed gas regulators and tanks  
copper alloy case, twist off lens, copper alloy internals

## SPECIFICATIONS

<b>Dial</b>	2" (50 mm), 2 ½" (63 mm)
<b>Case</b>	Highly polished copper alloy, dry non-fillable
<b>Wetted Parts</b>	Copper alloy
<b>Bezel</b>	Removable lens
<b>Lens</b>	Plastic, twist on
<b>Pointer</b>	Black aluminum
<b>Connection</b>	Center back mount ¼" NPT
<b>Scale</b>	Standard: single scale psi
<b>Accuracy</b>	3-2-3% of span, ASME B40.1 Grade B
<b>Ambient Temp</b>	-4° F to 140° F

*Design meets or exceeds ASME B40.100 pressure gauge standard.*

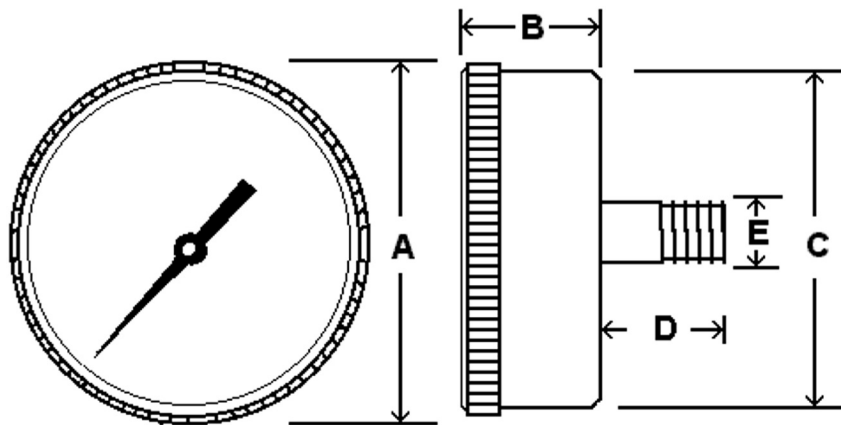

## AVAILABLE OPTIONS\*

- Custom Dial
- Special Connection Size
- Cleaned for Oxygen Service
- Ⓢ Listed (UL 252A or UL 404)
- Alternate Case Material
  - Painted Steel
  - Plastic
  - Stainless Steel

\*Lead times/minimums may apply

Dial	Unit	A	B	C	D	E
2"	In.	2.31"	1.08"	2.10"	0.84"	¼"
	mm	59	27	53	21	NPT
2 ½"	In.	2.83"	1.13"	2.65"	1.13"	¼"
	mm	72	29	68	29	NPT

## APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
2"	0.30 lbs (0.12 kg)	upon request
2 ½"	0.35 lbs (0.16 kg)	upon request

5