



AMMONIA-604 LOWER BACK MOUNT

Heavy duty 6" dry yet fillable gauge for ammonia refrigeration applications
Stainless steel case, 316 stainless steel internals

SPECIFICATIONS

Dial	6" (152 mm)
Case	Stainless steel, dry yet fillable, With back flange
Wetted Parts	316 stainless steel
Ranges	30/0/150 psi/-100/0/86° F 30/0/300 psi/-100/0/125° F
Bezel	Removable, stainless steel
Lens	Tempered glass
Pointer	Adjustable, black aluminum
Connection	Lower back mount 1/4" NPT
Scale	Standard: psi/° F temperature equivalent
Accuracy	0.5% of span ASME B40.1 Grade 2A
Ambient Temp	Dry = -30° F to 180° F Glycerine Filled = 30° F to 160° F



AVAILABLE OPTIONS*


- Certificate of Accuracy, NIST traceable
- Custom Dial
- Special Connection Size
- Cleaned for Oxygen Service
- Plastic Lens

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
6"	2.45 lbs (1.12 kg)	upon request

5

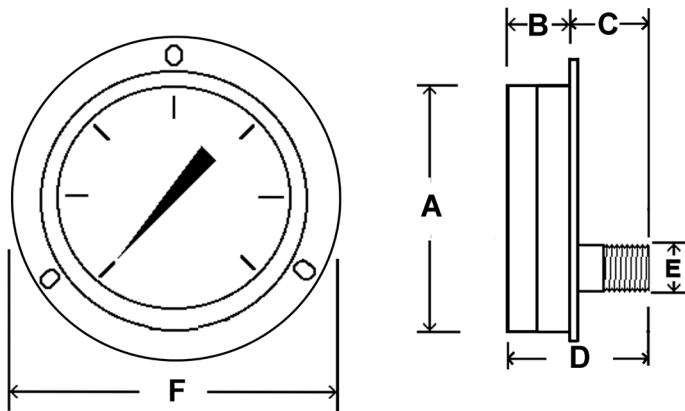

Dial	Unit	A	B	C	D	E	F
6"	In.	6.75"	2.00"	1.53"	3.53"	1/4"	7.65"
	mm	171	50	38	88	NPT	194