

# S215L BACK FLANGE

Glycerine filled for added durability in applications where vibration or pulsation is present  
 Stainless steel case and bezel, copper alloy internals  
 Heavy duty gauge designed for the dry bulk tanker market

## SPECIFICATIONS

<b>Dial</b>	4" (100 mm)
<b>Case</b>	Stainless steel with removable back flange Glycerine filled
<b>Wetted Parts</b>	Copper alloy
<b>Ranges</b>	Standard: 0/30 psi
<b>Bezel</b>	Stainless steel, fixed
<b>Lens</b>	Plastic
<b>Pointer</b>	Black aluminum
<b>Connection</b>	Lower mount 1/4" NPT
<b>Scale</b>	Standard: single scale psi
<b>Accuracy</b>	1% of span, ASME B40.1 Grade 1A
<b>Ambient Temp</b>	Glycerine Filled = 30° F to 160° F Dry = -30° F to 180° F



*Design meets or exceeds ASME B40.100 pressure gauge standard.*

## AVAILABLE OPTIONS\*


- Certificate of Accuracy, NIST Traceable
- Custom Dial
- Special Connection Size
- Other Lens Material
- Alternate Ranges

\*Lead times/minimums may apply

## APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
4"	1.65 lbs (0.74 kg)	30

5

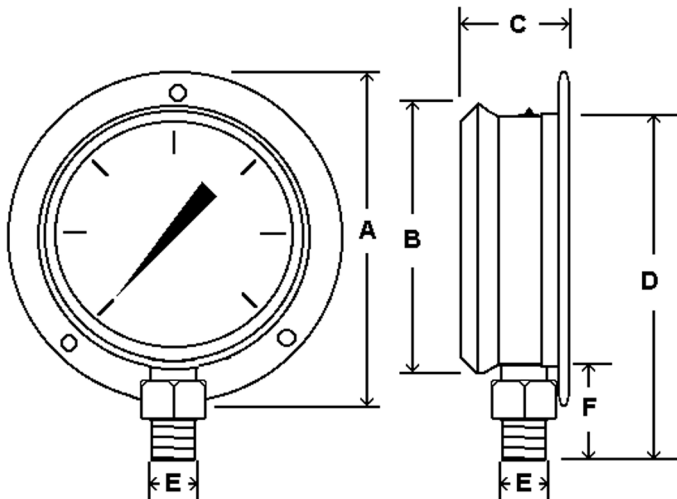

Dial	Unit	A	B	C	D	E	F
4"	In.	5.13"	4.29"	1.77"	5.19"	1/4"	1.30"
	mm	130	109	45	132	NPT	38

## STANDARD DIAL CONFIGURATIONS

Part Number	Dial Range	Figure Intervals	Graduation Intervals
S215L-404C	0/30 psi	3 psi	0.2 psi