

PRECISION AG GAUGE

Glycerine filled for added durability in applications where vibration or pulsation are present, stainless steel case and bezel, copper alloy internals, with UV dial


SPECIFICATIONS

Dial	2 1/2" (63 mm), 4" (100 mm)
Case	Stainless steel, glycerine filled
Wetted Parts	Copper alloy
Bezel	Stainless steel, crimped
Lens	Polycarbonate
Pointer	Black aluminum
Connection	2 1/2" dial = 1/4" NPT 4" dial = 1/2" NPT
Scale	Single scale PSI
Pressure Ranges:	3K Hg Vac - 10,000 PSI
Accuracy	3-2-3% of span 2 1/2" & 4" ASME B40.1 Grade A
Ambient Temp	Glycerine Filled = 30° F to 180° F

Mount Styles	2.5" Lower Mount 4" Lower Mount 2.5" Center Back Mount
--------------	--



Design meets or exceeds ASME B40.100 pressure gauge standard.

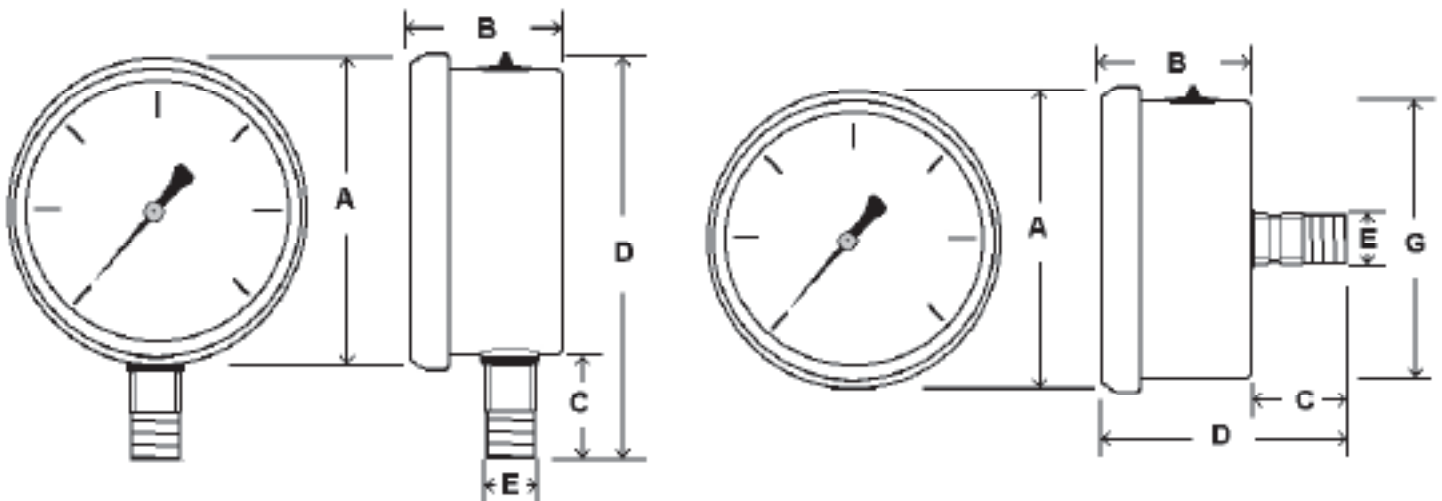

Dial	Unit	A	B	C	D	E	Dial	Unit	A	B	C	D	E	G
2 1/2"	In.	2.64"	1.18"	0.87"	3.30"	1/4" NPT	2 1/2"	In.	2.64"	1.18"	0.91"	2.12"	1/4" NPT	2.44"
	mm	67	30	22	84			mm	67	30	23	54		62
4"	In.	4.28"	1.77"	1.08"	5.12"	1/2" NPT	APPROXIMATE SHIPPING WEIGHTS/BOX QUANTITIES							
	mm	109	45	27	130									
Part Numbers							Dial Size	Est. Unit Weight	Box Qty					
2 1/2" Lower Mount		AG-201L-254(X)					2 1/2"	0.48 lbs (0.22 kg)	Lower Mount		100			
4" Lower Mount		AG-201L-404(X)							Center Back Mount		60			
2 1/2" Center Back Mount		AG-202L-254(X)					4"	1.8 lbs (0.73 kg)	30					
(X) Denotes Pressure Range														