

SPRINKLER GAUGE




UL listed gauge designed for use on fire protection/sprinkler systems
 Suitable for air, water, oil, gas or other media not corrosive to Copper alloy

SPECIFICATIONS

Dial	3 1/2" (88.9 mm), UL listed/FM Approved
Case	Plastic, dry non-fillable
Wetted Parts	Copper alloy
Ranges	0/300 psi Water; 0/80-250 psi Air Retard
Bezel	Removable lens
Lens	Plastic, twist-off
Pointer	Black aluminum
Connection	Lower mount 1/4" NPT
Scale	Standard: single scale psi
Accuracy	3-2-3% of span, ASME B40.1 Grade B
Ambient Temp	Dry = -50° F to 160° F

Design meets or exceeds ASME B40.100 pressure gauge standard.

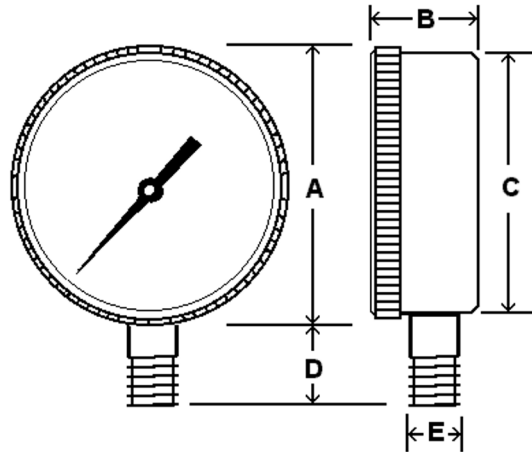

Dial	Unit	A	B	C	D	E
3 1/2"	In.	3.85"	1.19"	3.71"	1.08"	1/4" NPT
	mm	97.8	30.2	94	28	

AVAILABLE OPTIONS*

- Custom Dial
- Special Connection Size
- Other Ranges
- Repairable

*Lead times/minimums may apply

APPROXIMATE SHIPPING WEIGHTS/ BOX QUANTITIES

Dial Size	Est. Unit Wt.	Box Qty
3 1/2"	0.45 lbs (0.22 kg)	50

SPRINKLER PART NUMBERS

Part Number	Dial Range	Figure Intervals	Graduation Intervals
SPRINKLER-AIR	0/80/250	100 psi	10 psi
SPRINKLER-WATER	0/300 psi	25 psi	5 psi